

Programmable, LED Indication Panels

Features

- 8 and 24 LED versions available as standard
- Large versions available to special order
- Up to 16 x 24 way Syncro Ident can be connected to each fire panel
- Programmable flashing or steady states
- Red, yellow or green indications/ options
- Common Fire, Fault and Disabled indication
- Customisable label identification tags
- Buzzer with silence control and re-sound
- Lamp test control
- Low power 24V DC supply
- Connects to 2 wire Syncro RS485 data bus
- Multiple language options

Product Overview

- Syncro Ident panels provide a compact and attractive display for up to 24 indications from a Syncro or Syncro AS fire control panel.
As with all inputs and outputs on the Syncro system, each indicator is fully programmable to indicate a variety of events as well as being fully programmable via cause and effects to operate in response to logically connected inputs. Each indication defaults to a zonal fire indicator but may be configured via the Loop Explorer configuration utility to operate upon any event type or combination of inputs.
- Requiring only a low current 24V power supply and a 2 core data connection to the fire panel, Syncro Ident panels can be installed quickly and easily to provide supplementary information on the status of the fire alarm system with the minimum of cost and effort.
- The compact, slimline enclosure is unobtrusive and is ideal for mounting in locations where a larger control and indication unit would be unsuitable.
- Each indication has a dedicated field for customized text to provide a concise description of the indication.
- Multiple Syncro Ident panels can be connected to the Syncro serial bus to provide a diverse range of indications at multiple locations.



Model No. K6524L2

Panels

Product Code	No. of LEDs	Size (mm)
K6508L2	8	385 x 310 x 60
K6524L2	24	385 x 310 x 60

Versions with more LED indications available to special order



Technical

- Construction** - 1.2mm mild sheet steel
- Finish** - Epoxy powder coated
- Colour - lid & box** - BS 00 A 05 grey - fine texture
- Colour - controls plate & labels** - RAL 7047 light grey - satin
- LED colours** - Red, yellow or green
- Supply Voltage** - 18 to 30V DC
- Data Connection** - RS485 Syncro comms bus (Max 1200 metres)

Specification

Examples of Syncro Ident panel used to provide supplementary indications from the fire control panel

Syncro AS Fire Control Panel

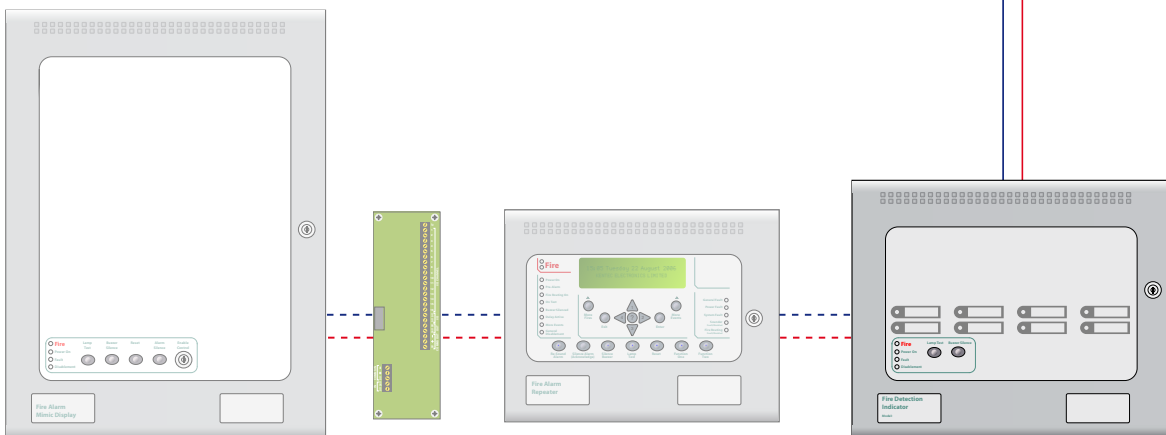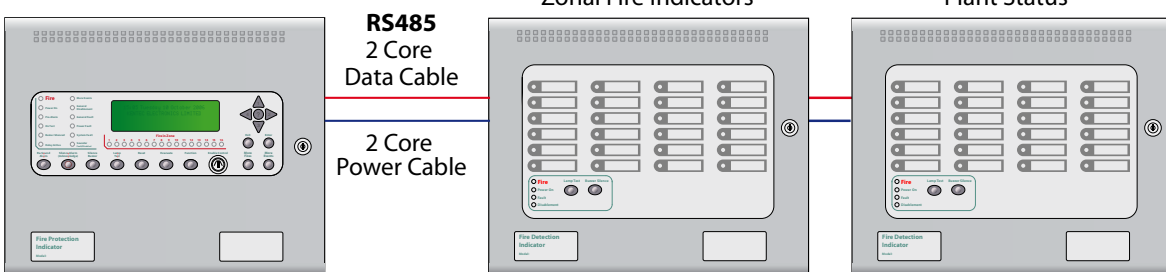

Syncro Matrix

Syncro I/O

Syncro View

Disabled Refuge Alarms

Other RS485 compatible devices