





Each loop is capable of hosting up to 126 devices.

Loop 1 Loop 2 (if fitted) Loop 3 Loop 4

A mixture of up to 32 devices (including eVIEW & eMATRIX boards) can be fitted to each panel on the RS485 serial interface. The maximum number of eVIEW panels on a single RS485 serial interface is 15.

Each loop is capable of hosting up to 126 devices.

Control panels are supplied with 1, 2 or 4 detection loops.

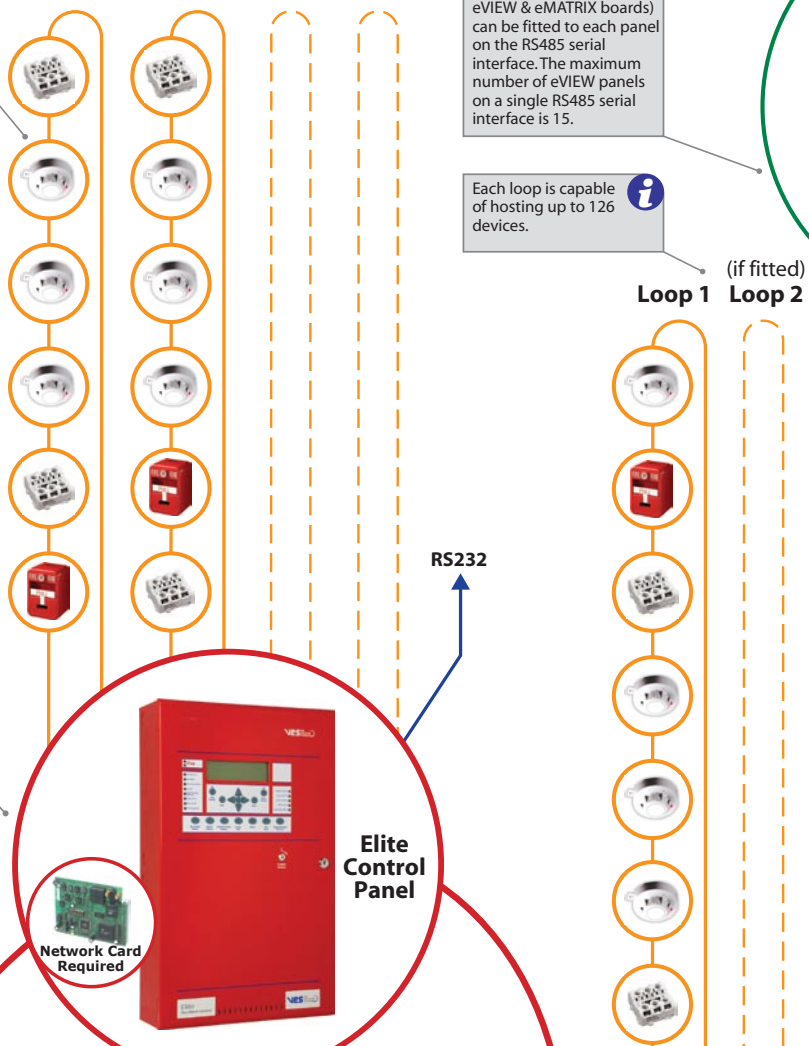

RS485 I/O BUS



RS232



High Integrity Configurable Network

Up to 64 Panels can be added to the network.

Network Card Required

Network Card Required

Network Card Required

RS232
RS485

Elite Control Panel
RS232
RS485

24V DC

24V DC

24V DC